

**Caratteristiche:**

Diffusori circolari a geometria variabile.

**Costruzione:**

Campana in alluminio, alette in acciaio, finitura verniciato bianco RAL 9010.

**Impiego:**

A soffitto o a parete, in mandata. Altezza di installazione: 2,5 - 20 m.

**Fissaggio:**

Fissaggio mediante viti sul collo del diffusore.

**Accessori:**

- Plenum di raccordo in acciaio zincato con isolamento e serranda di taratura.
- Rete equalizzatrice.

**Characteristics:**

Variable geometry circular diffusers.

**Construction:**

Bell in aluminium, fins in steel, finish painted white RAL 9010.

**Utilization:**

For ceiling or wall installation and for air delivery.

Installation height: 2,5 - 20 m.

**Fixing:**

Fixing by screws on neck diffuser.

**Accessories:**

- Galvanized steel connecting plenum with insulation and calibration damper.
- Equalizer mesh.

**PREZZI / PRICES**

	DCG	DCG-E	DCG-E-M	DCG-E-P	PDC	PDCI	Serranda per Plenum Damper for Plenum	Equalizz. per Plenum Equalizer for Plenum
Ø mm	€	€	€	€	€	€	€	€
* 200	-	-	-	-	-	-	-	-
* 250	-	-	-	-	-	-	-	-
* 315	-	-	-	-	-	-	-	-
* 400	-	-	-	-	-	-	-	-
* 500	-	-	-	-	-	-	-	-
* 630	-	-	-	-	-	-	-	-

**DESCRIZIONI:**

DCG: diffusore con alette orientabili manualmente e simultaneamente.

DCG-E: diffusore con alette orientabili manualmente e simultaneamente con equalizzatore.

DCG-E-M: diffusore con alette orientabili simultaneamente motorizzabile, con equalizzatore.

DCG-E-P: diffusore con alette orientabili manualmente e simultaneamente con equalizzatore, su pannello 595x595.

**DESCRIPTION:**

DCG: diffuser with manually and simultaneously movable blades.

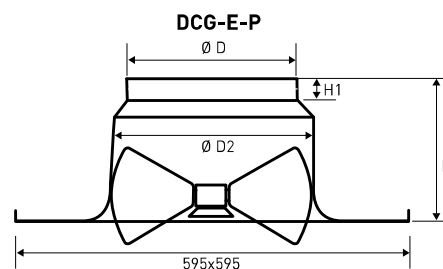



DCG-E: diffuser with manually and simultaneously movable blades, with equalizer.

DCG-E-M: diffuser with simultaneously movable blades motorizable, with equalizer.

DCG-E-P: diffuser with manually and simultaneously movable blades, with equalizer, made on 595x595 panel.

**MISURE / MEASURES**

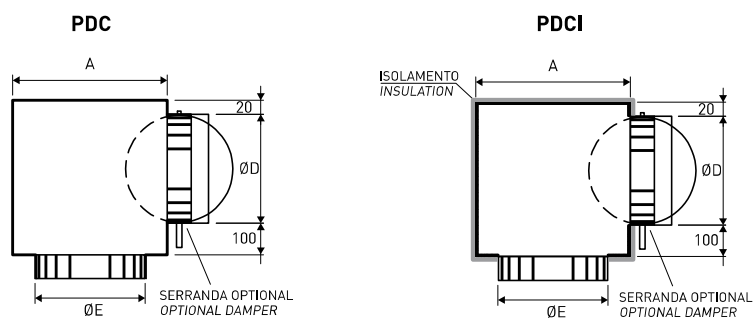
Dimensioni nominale BxH mm Nominal dimensions BxH mm	DCG				
	ØD	ØD1	ØD2	H	H1
200	198	310	242	174	40
250	248	400	315	200	40
315	313	475	375	235	40
400	398	600	460	260	50
500	498	785	570	315	60
630	628	920	700	320	65

**DISEGNI / DRAWINGS**

MISURE / MEASURES

Dimensioni nominale BxH mm Nominal dimensions BxH mm	PLENUM ZINCATO mm / GALVANIZED PLENUM mm		
	AxA	ØD	ØE
200	300x300	196	202
250	350x350	246	252
315	400x400	311	317
400	500x500	351	403
500	600x600	446	503
630	700x700	496	633

DISEGNI / DRAWINGS



**PDZI**  
 Plenum isolato esternamente  
 a norma UNI ENV 12097/1999  
 in Polietilene adesivo CL1  
 spessore 6 mm  
*Plenum externally insulated  
 according to UNI ENV 12097/1999  
 in Polyethylene adhesive film CL1  
 thickness 6 mm*




DIAGRAMMA SCELTA RAPIDA / QUICK SELECTION DIAGRAM

ALETTE INCLINATE A 45° / CURVED BLADES AT 45°

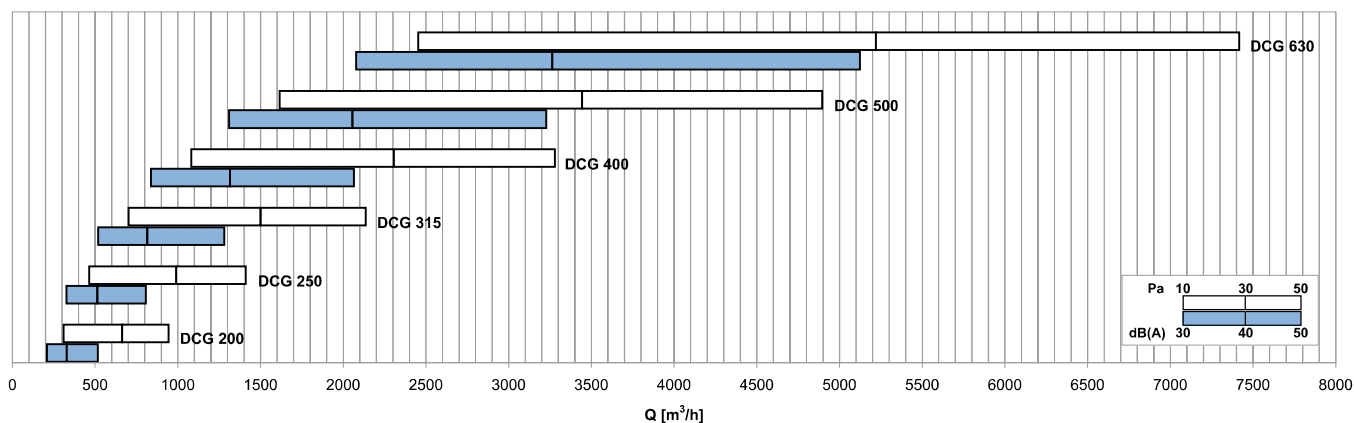


TABELLA DI SELEZIONE / SELECTION TABLE

ALETTE INCLINATE A 45° / CURVED BLADES AT 45°

Modello Model	A <sub>v</sub> [m²]	Q [m³/h]		L <sub>wa</sub> [dB(A)]		Y <sub>(0,25)</sub> [m]		D <sub>p</sub> [Pa]	
		min	max	min	max	min	max	min	max
<b>DCG 200</b>	0,0314	310	950	39	64	2,1	6,7	10	50
<b>DCG 250</b>	0,0491	460	1410	38	62	2,4	7,7	10	50
<b>DCG 315</b>	0,0779	700	2140	37	61	2,9	9,1	10	50
<b>DCG 400</b>	0,1257	1080	3280	36	60	3,6	11,2	10	50
<b>DCG 500</b>	0,1963	1620	4900	35	59	4,5	14,5	10	50
<b>DCG 630</b>	0,3117	2450	7420	34	58	6,1	20,9	10	50