

FRESH 31/31F

Air supply unit for window mounting • 2004-01-01



- Easy to regulate
- Easy to assemble



Fresh 31

Fresh 31/31F

Window vents which can be mounted both protruding over a row of holes/slot, or countersunk with the wall. Fresh 31F has a flange which cover the recess.

An external grille is mounted outside to prevent water penetration.

Specification

Product	Description	Art no
Fresh 31 Individually packed	Complete vent with internal part and external grille	131001
Fresh 31 Bulk	Complete vent with internal part and external grille	310031
Fresh 31 Individually packed	Internal part	310011
Fresh 31F Bulk	Complete vent with internal part and external grille	311031
Fresh 31F Internal part	Internal part	311011

The vents are available in other colours, please contact Fresh AB for more information.

Technical data

Product	Fresh 31	Fresh 31F
Capacity at 10 Pa slot:	7,0 l/s	7,0 l/s
Capacity at 10 Pa row of holes:	5,0 l/s	-
Wall opening slot: (mm)	330 x 10	330 x 10
Wall opening row of holes: (mm)	20 x Ø12	-
Material:	ABS plastic (recyclable)	ABS plastic (recyclable)
Colour:	White, RAL 9010	White, RAL 9010

FRESH 31/31F

Air supply unit for window mounting • 2004-01-01


Description/function

The vents can be mounted both protruding over a row of holes/slot, or countersunk with the wall. Fresh 31F has a flange which covers the recess. An external grille is mounted outside to prevent water penetration.


Internal part

The internal part is equipped with a variable precision damper which is adjusted by a regulator (on the front of the vent). A minimum flow-stopper can be used to ensure a certain airflow (accessory).

Fresh 31




Fresh 31F

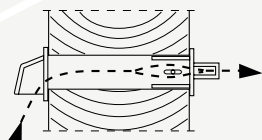

Capacity

— Row of holes
- - - Slot

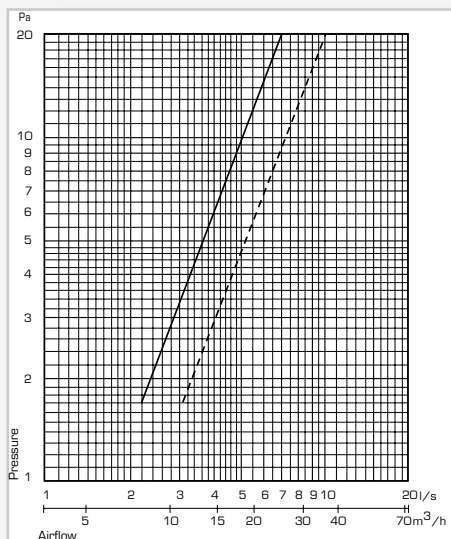

Maintenance

In order to ensure correct airflow we recommend to clean the vent and channel every 2-3 years.

Accessories



Drill pattern

Aligns the drill and provides the correct distance between holes



Channel 33

Intended for hole profiles in plastic and aluminium windows (F32)



Flat grille (FG)

Used as external grille for F22/32 when mounted on special constructions 363x29mm



Vertical grille (VG)

Used as external grille for F22/32 when the vent is mounted vertically 368x22mm

Technical data Fresh 31


Capacity at 10 Pa:	Slot 7,0 l/s Row of holes 5,0 l/s
Wall opening:	Slot 330 x 10 mm Row of holes 20 x Ø12 mm
Material:	ABS plastic (recyclable)
Colour:	White, RAL 9010

Technical data Fresh 31F


Capacity at 10 Pa:	Slot 7,0 l/s
Wall opening:	Slot 330 x 10 mm
Material:	ABS plastic (recyclable)
Colour:	White, RAL 9010

Dimensions Fresh 31/31F

Fresh 31

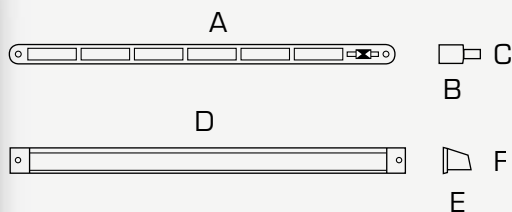

Fresh 31F

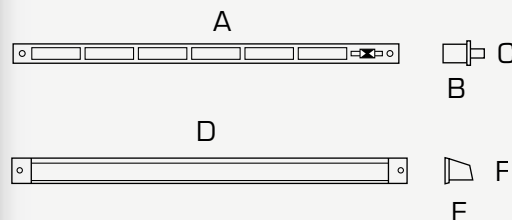

Dimensions Fresh 31/31F (mm)

Prod/dim	A	B	C	D	E	F
Fresh 31	368	17	16	363	23	21
Fresh 31F	371	17	19	363	23	21



FRESH AB
Box 7
SE-360 32 GEMLA
www.fresh.se

Telephone +46 (0)470 70 77 00
Fax +46 (0)470 70 77 39

E-mail information@fresh.se