


NEW FORM OF AIR

The new Climecon DINO range with its various models is the best solution for displacement ventilation.

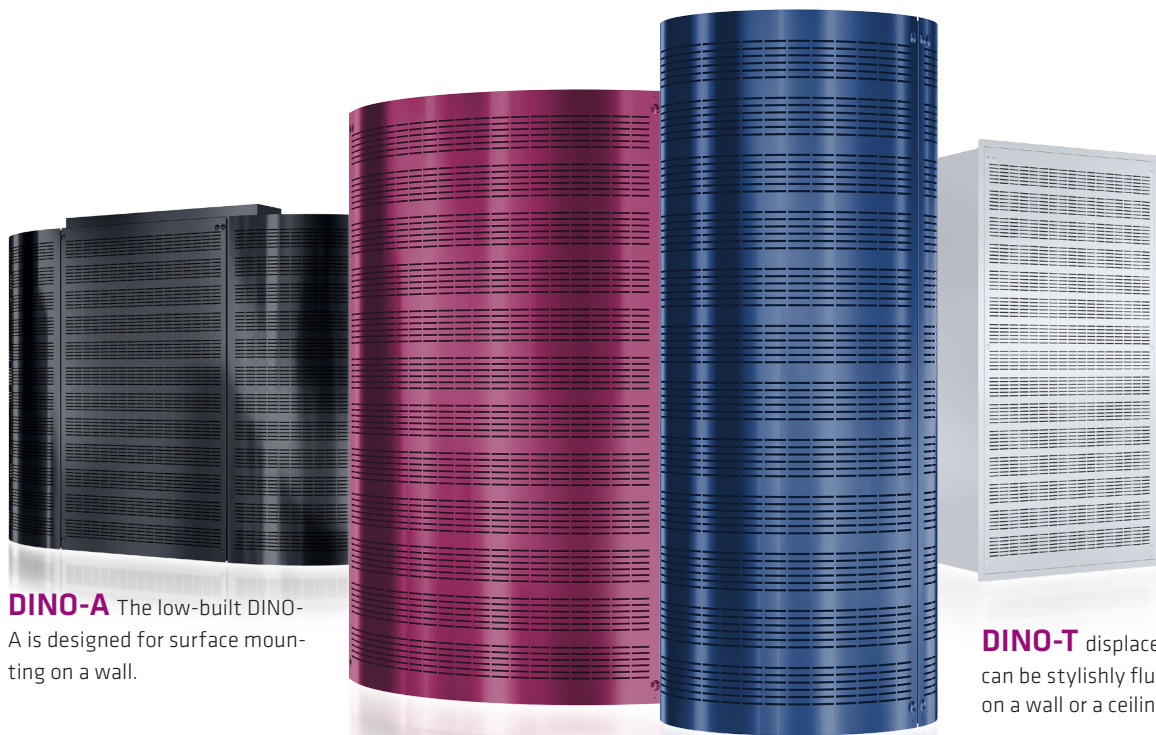

DINO-A The low-built DINO-A is designed for surface mounting on a wall.

DINO-K with its stylish design is intended for corner installation.

DINO-R The column-shaped DINO-R is designed for installation in the middle of a floor.

DINO-T displacement diffuser can be stylishly flush-mounted on a wall or a ceiling.

The displacement diffusers in the new DINO series which are designed for displacement ventilation combine **high capacity, an elegant design, and flexibility when it comes to making adjustments during the whole life cycle of the diffusers.**

The displacement diffusers of the DINO series provide premises with silent and draught-free air distribution, in places such as:

- Classrooms
- Restaurants
- Meeting rooms
- Fitness premises
- Industrial premises
- Professional kitchens


Also all high premises in which large air volumes are needed.

In addition to the active supply air unit, the DINO series also include new and innovative regulators with a sound attenuating part as well as duct covers to achieve a uniform and stylish look. The patented regulator ensures constant air-flow to the supply air diffuser, contributing to a smooth and draught-free throw pattern for the supply air diffuser.

The model range caters for various wall and corner installations, plus mid-floor and ceiling installation. The throw patterns of the displacement diffusers in the DINO series can also be re-directed if the interior of the premises is changed in any way.


The products in the DINO series are produced from galvanised sheet steel and are also available in different colours.

DINO-A

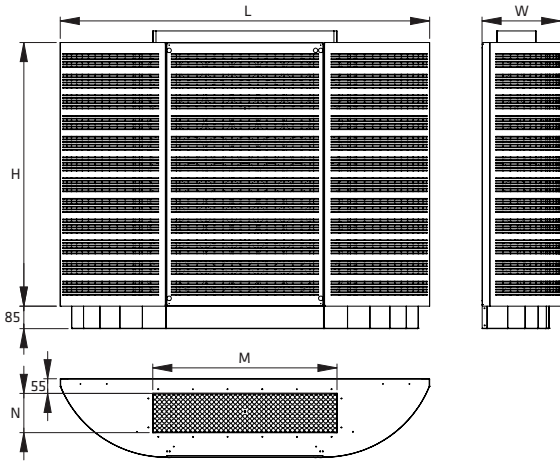


	L	H	W	M	N	kg
DINO-A-300x60	720	400	200	299	59	9,5
DINO-A-400x100	1000	600	250	399	99	17,5
DINO-A-700x150	1400	1000	300	699	149	35,5
DINO-A-1000x200	2000	1400	390	999	199	67,0

DINO-T

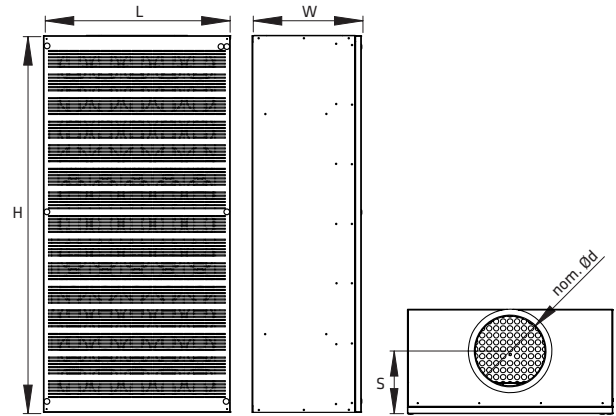


	nom. Ød	L	H	W	S	kg
DINO-T-125	125	590	590	255	143	10,0
DINO-T-160	160	590	590	310	160	11,0
DINO-T-200	200	590	1190	345	180	23,0
DINO-T-250	250	590	1990	395	205	35,0
DINO-T-315	315	1190	1990	440	238	51,0
DINO-T-400	400	1190	1990	540	280	55,0


DINO-A Quick guide

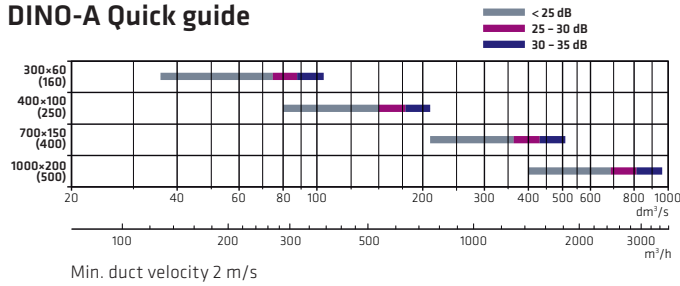

DINO-T Quick guide

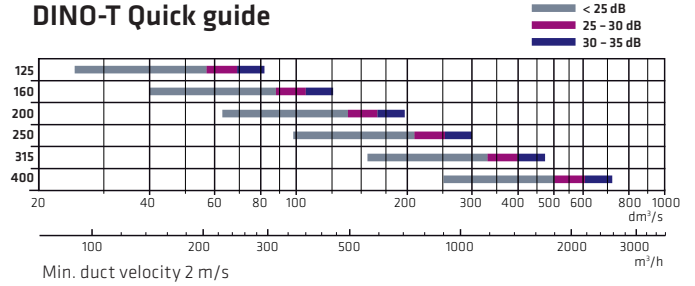


DINO-K

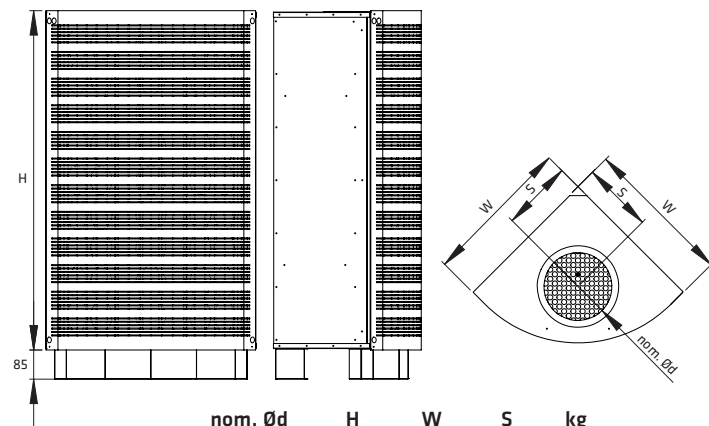


	nom. Ød	H	W	S	kg
DINO-K-125	125	600	336	160	9,0
DINO-K-160	160	600	336	147	9,0
DINO-K-200	200	1000	440	208	16,5
DINO-K-250	250	1000	440	190	16,5
DINO-K-315	315	1500	506	214	27,0
DINO-K-400	400	2000	526	264	42,5

DINO-R

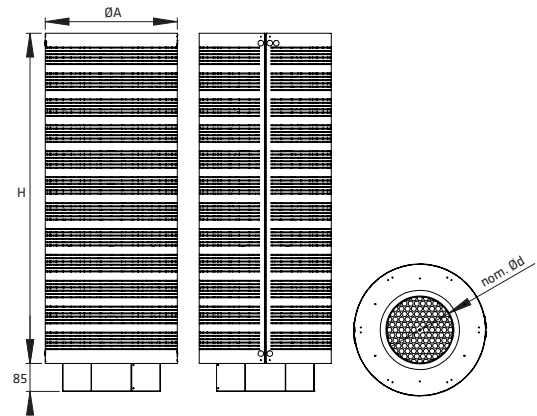

	nom. Ød	ØA	H	kg
DINO-R-125	125	300	600	8,5
DINO-R-160	160	300	600	8,5
DINO-R-200	200	440	1000	19,0
DINO-R-250	250	440	1000	19,0
DINO-R-315	315	470	1500	30,0
DINO-R-400	400	570	2000	48,0

DINO-K Quick guide

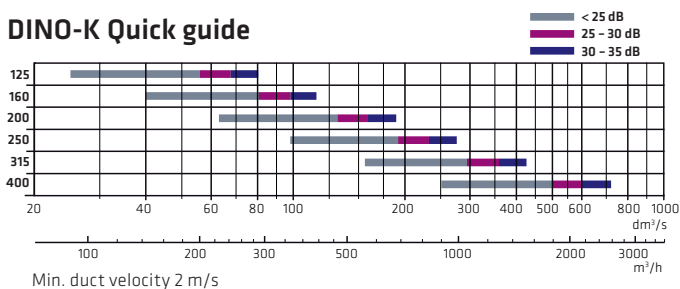

DINO-R Quick guide

