


METAL EXHAUST AIR VALVE WITH FIXING COLLAR.

PRODUCT PROPERTIES

- diameter range 80, 100, 125, 150, 160 and 200 mm
- manufactured out of powder coated steel
- standard colour white (RAL 9010), other colours on request
- continuously variable adjusting of the air quantity
- the combination of fixing collar with bayonet catch and sealing tape provides an optimal sealing
- a fixing collar is included
- a DVS-L longsleeve for mounting in declining ceilings and in walls is optional

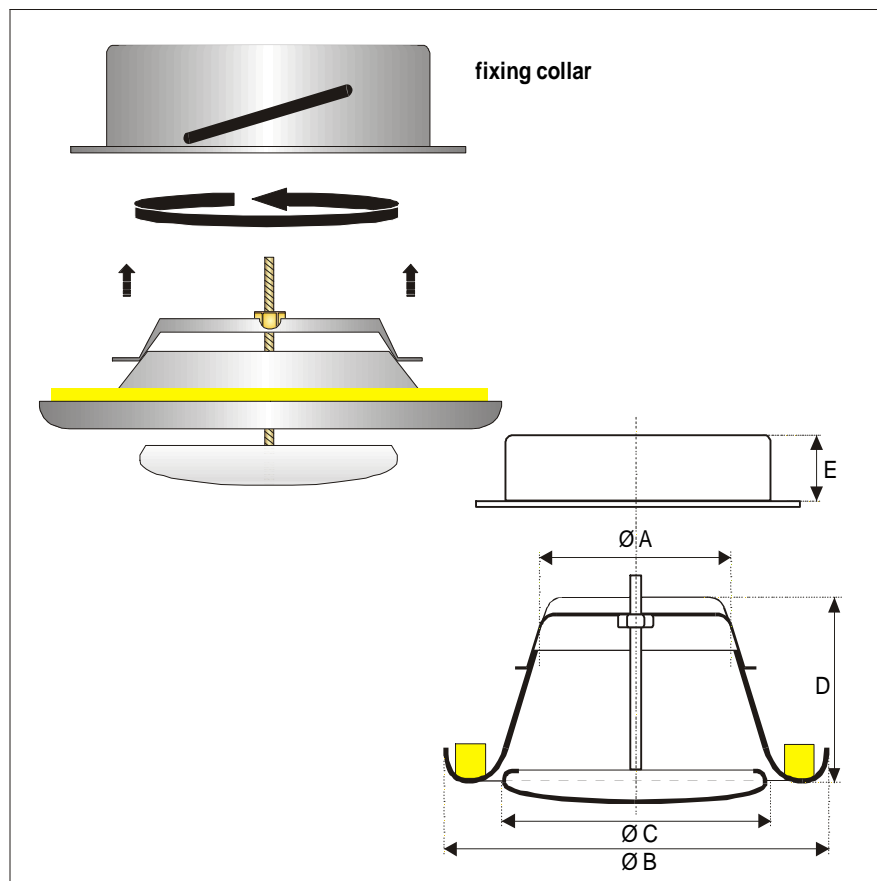


DIMENSIONS (IN MILLIMETRES)

DVS	Ø 80	Ø 100	Ø 125	Ø 150	Ø 160	Ø 200
A	60	74	97	117	125	155
B	116	139	163	202	210	248
C	77	94	111	135	145	194
D	42	47	54	60	63	63
E	29	50	50	50	50	50

METAL SUPPLY AIR VALVE WITH SPRING FASTENING.

PRODUCT PROPERTIES

- diameter range 80, 100, 125, 150, 160 and 200 mm
- manufactured out of powder coated steel
- standard colour white (RAL 9010), other colours on request
- adjusting of air quantity continuously variable
- the combination of spring fastening and sealing tape provides an optimal sealing
- suitable for direct mounting in round, rigid ducts
- a DVS-L longsleeve for mounting in declining ceilings and in walls is optional

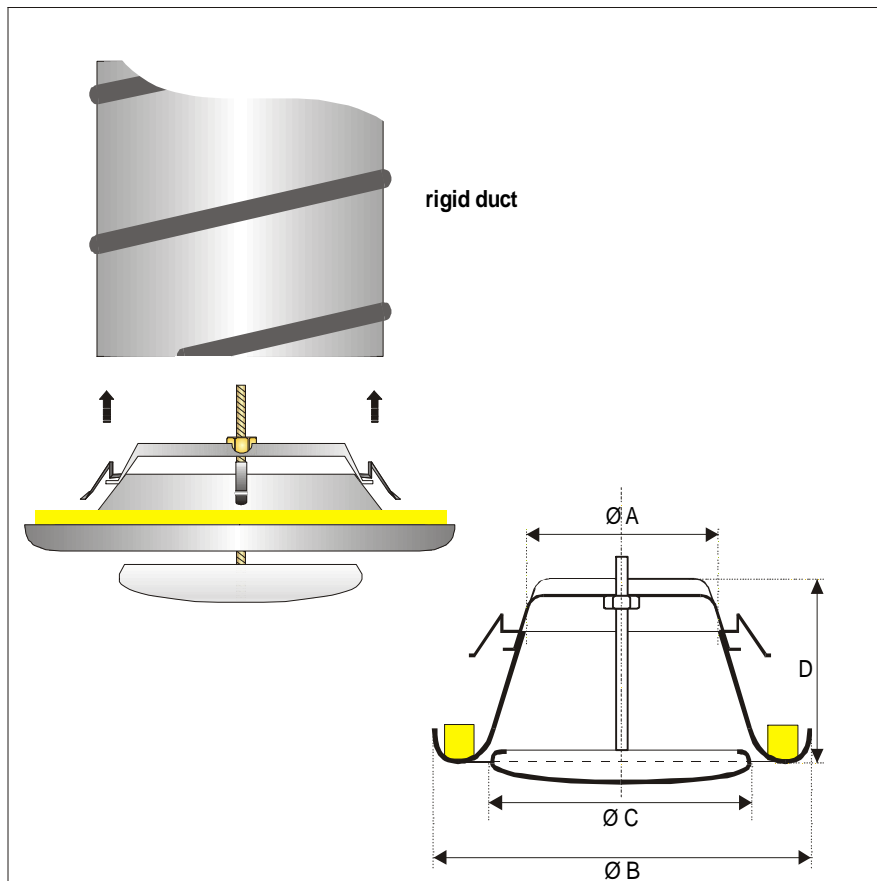


3.3

DIMENSIONS (IN MILLIMETRES)

DVSC	Ø 80	Ø 100	Ø 125	Ø 150	Ø 160	Ø 200
A	60	74	97	117	125	155
B	116	139	163	202	210	248
C	77	94	111	135	145	194
D	42	47	54	60	63	63


PRESSURE LOSS AND SOUND LEVEL
DVS/DVSC

Ø 80 mm

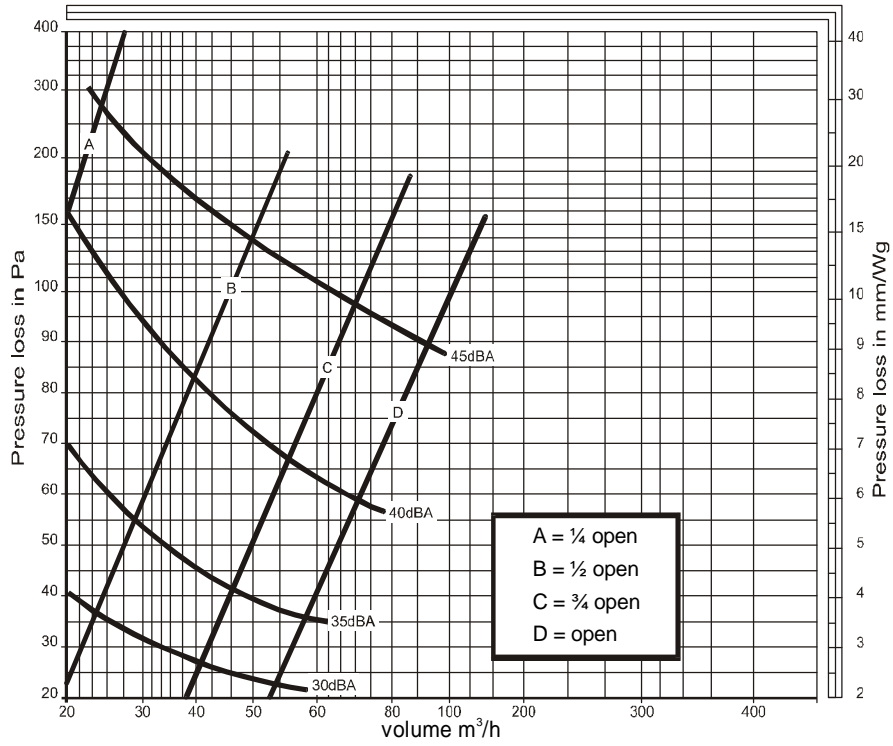


3.3

Ø 100 mm

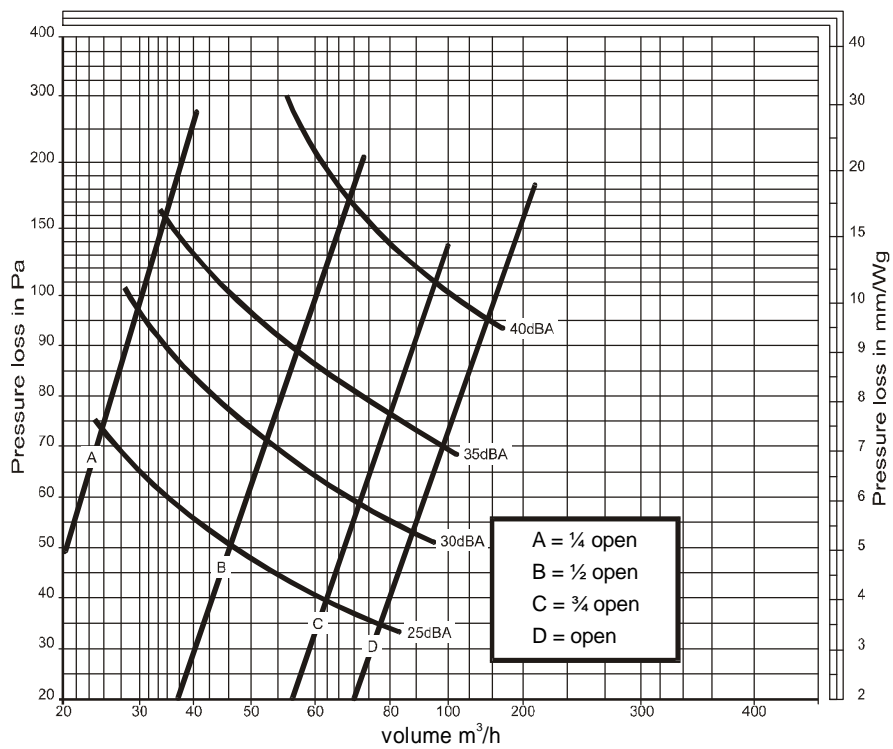


PRESSURE LOSS AND SOUND LEVEL
DVS/DVSC

Ø 125 mm

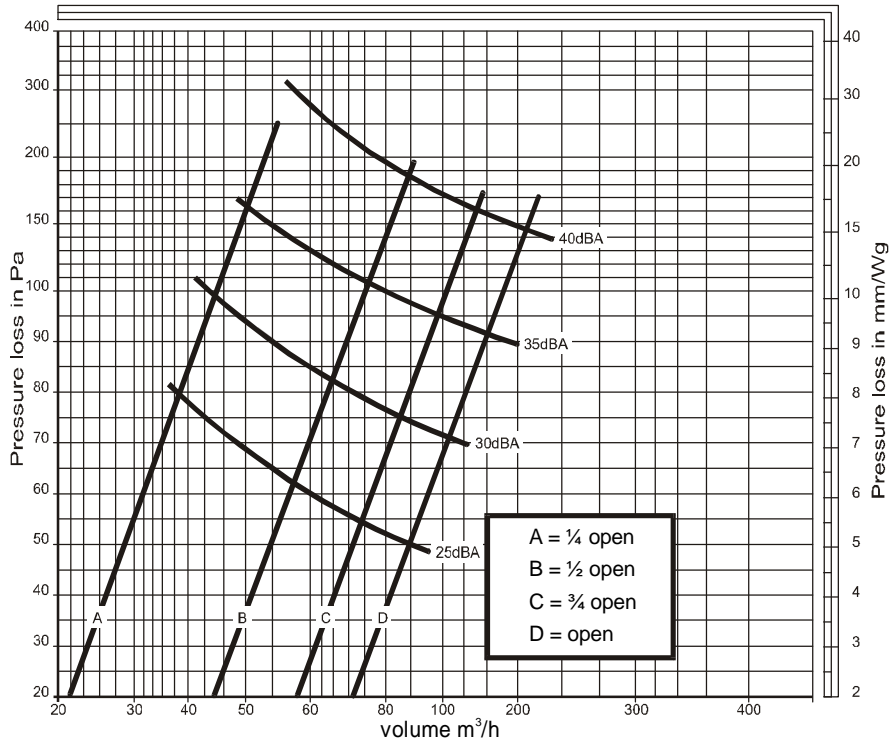


3.3

Ø 150 mm

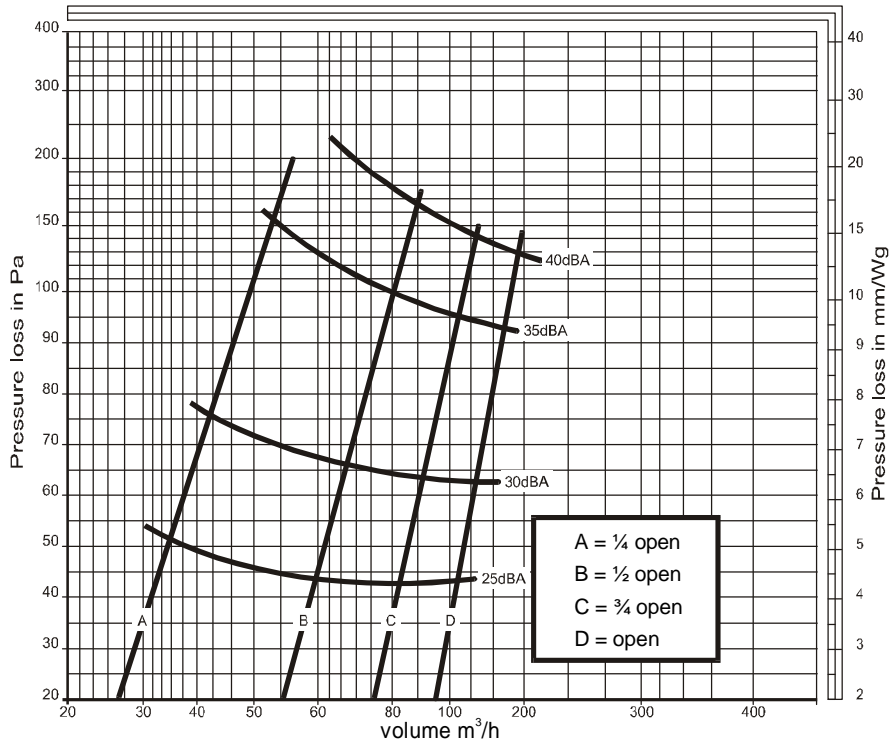


PRESSURE LOSS AND SOUND LEVEL
DVS/DVSC

Ø 160 mm

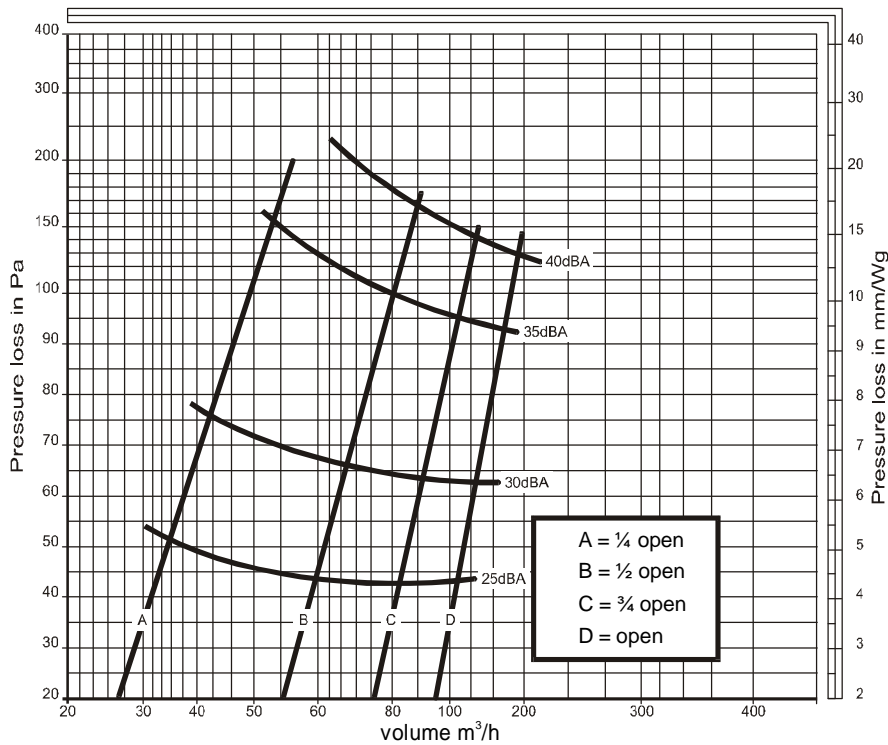

Ø 200 mm

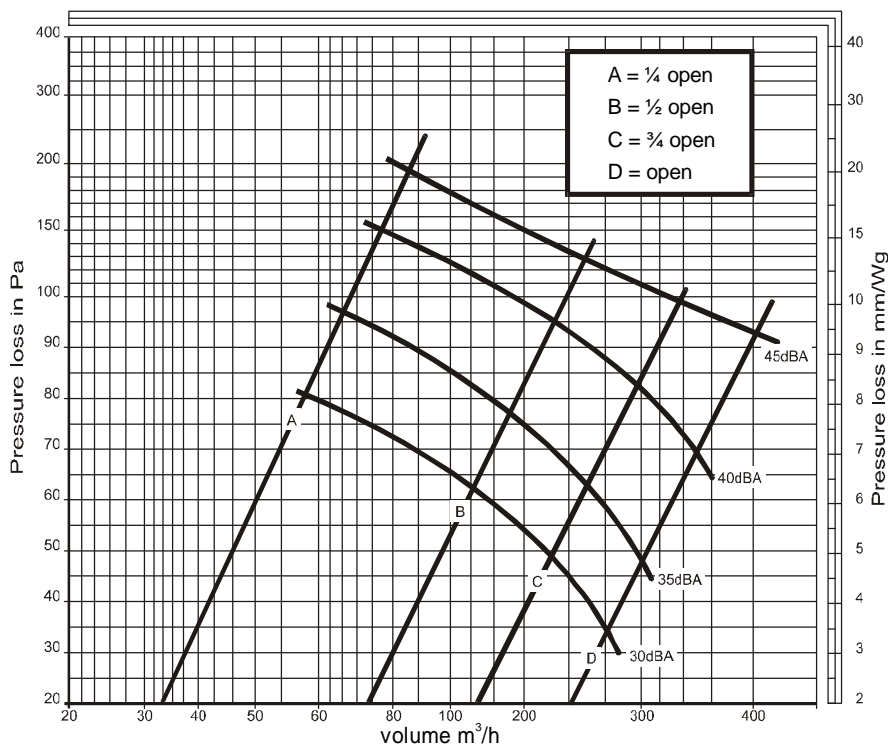

3.3