

- Dust & insect filter as standard
- Built-in air-deflector
- Concealed screw fixings
- Easy to regulate
- Low pressure drop



## Fresh 40

Window vent which is positioned over a row of holes or a slot in the frame/arch. The front functions as combined damper and air deflector. An external grille is mounted outside to prevent water penetration.

Specification		
Product	Description	Art no
Fresh 40 Individually packed	Complete vent with internal part and external grille	401031
Fresh 40 Bulk	Complete vent with internal part and external grille	401021
Fresh 40 Internal part	Internal part	401011

Technical data	
Capacity:	9,2 l/s at 10 Pa
Wall opening:	Slot 400 x 10 mm or row of holes 24 x Ø10 mm
Material:	ABS plastic (recyclable)
Colour:	White, RAL 9010

# FRESH 40

Air supply vent

## Description/function

Window vent which is positioned over a row of holes or a slot in the frame/arch. A complete vent contains internal part and external grille. The internal part is supplied with a dust & insect-filter as standard. The external grille prevents water penetration and has a built-in mesh. A drill pattern is available as accessory.


## Internal part

The front functions as combined damper and air-deflector. The airflow is simply regulated by opening/closing the front (with help of the handles on each side).


When the front is fully open the air enters nearly straight forward, the air-direction is easily adjusted by gradually closing the front.

## Maintenance

In order to ensure correct airflow and to retain good air quality it is important to wash the filter 1-2/year (use a gentle soap/detergent).

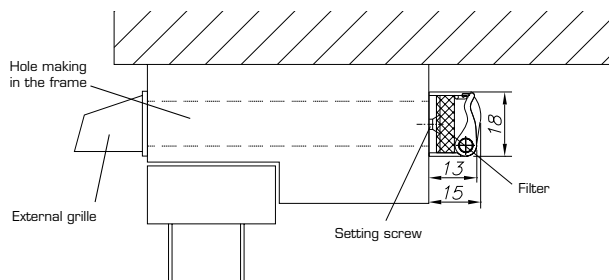


## Dimensions Fresh 40

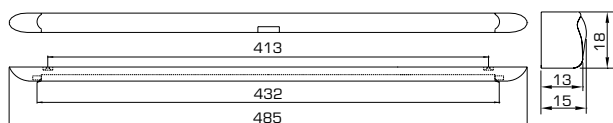


## Technical data Fresh 40

Capacity at 10 Pa:	Slot 9,2 l/s Row of holes 5,3 l/s
Wall opening:	Slot 400 x 10 mm Row of holes 24 x Ø10 mm
Material:	ABS plastic (recyclable)
Colour:	White, RAL 9010

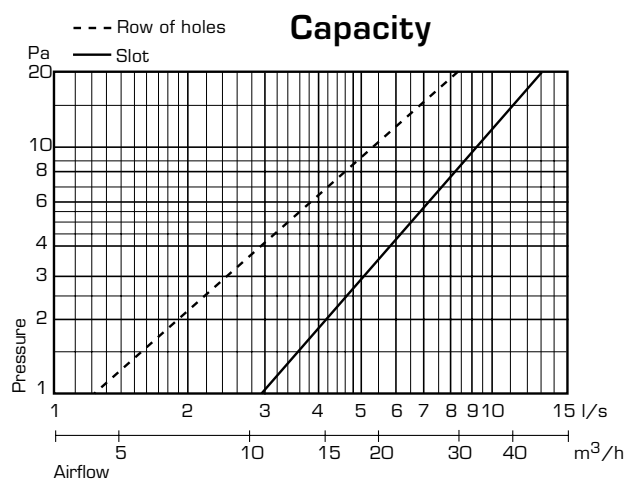

## Accessories



**Drill pattern**  
Aligns the drill and provides the correct distance between holes



**Filter**  
Washable dust & insect-filter



**Channel 33**  
Intended for hole profiles in plastic and aluminium windows.



**Storm shield**  
Protection against heavy winds



**Vertical grille (VG)**  
Used as external grille when mounted vertically (368x22mm)