

VIP exhaust valve



VIP exhaust valve

VIP is a stylish, low-structure exhaust air valve for quality construction. VIP features lockable adjustment and completes the home interior with its modern look.

Air flow range

4-80 dm³/s, 14-288 m³/h

Duct sizes

Ø 100-200 mm

Installation

For wall installation

Color options

RAL 9016 white (matte), RAL 9005 black (matte)

Description

The stylish VIP and **VIP-S** exhaust valves are designed to complement home interiors. Both feature lockable adjustment.

VIP-S is an exhaust valve designed specifically for saunas and features optional linear adjustment. VIP-S has extremely low structural design and has a modern, stylish adjustment knob made of wood, which makes it blend in perfectly with the wall and ceiling surfaces of most saunas.


VIP and VIP-S are delivered in protective individual packages, including a collar joint with a gasket.

VIP is available in sizes Ø100-200, and VIP-S in sizes Ø100 and 125.

The standard colours of both products are RAL 9016 and RAL9005.


Quick guide

VIP and VIP-S

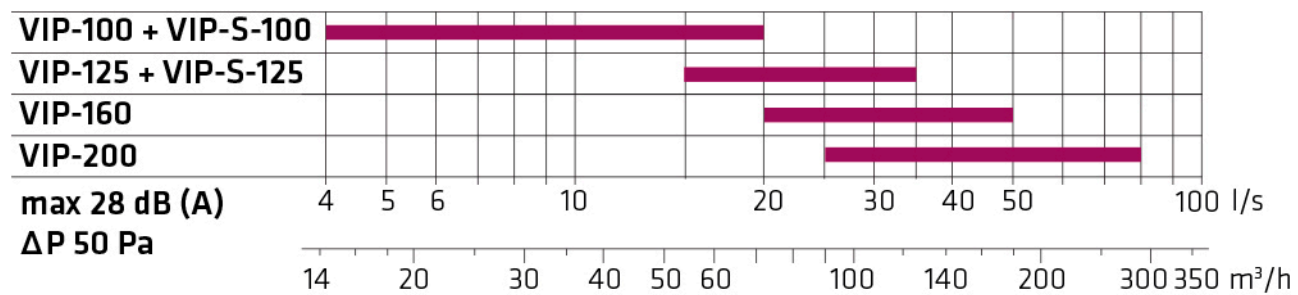

Dimensions


VIP

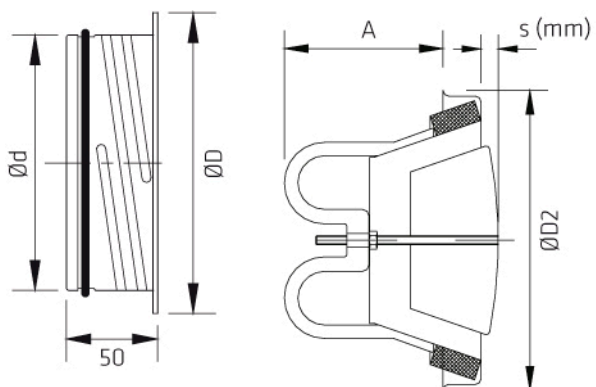

	$\varnothing D$	A	kg	$\varnothing d$	$\varnothing D2$
VIP-100	135	71	0,355	99	122
VIP-125	161	85	0,462	124	148
VIP-160	191	85	0,601	159	184
VIP-200	241	107	0,885	199	225

Selection diagram

VIP-100 and VIP-S-100

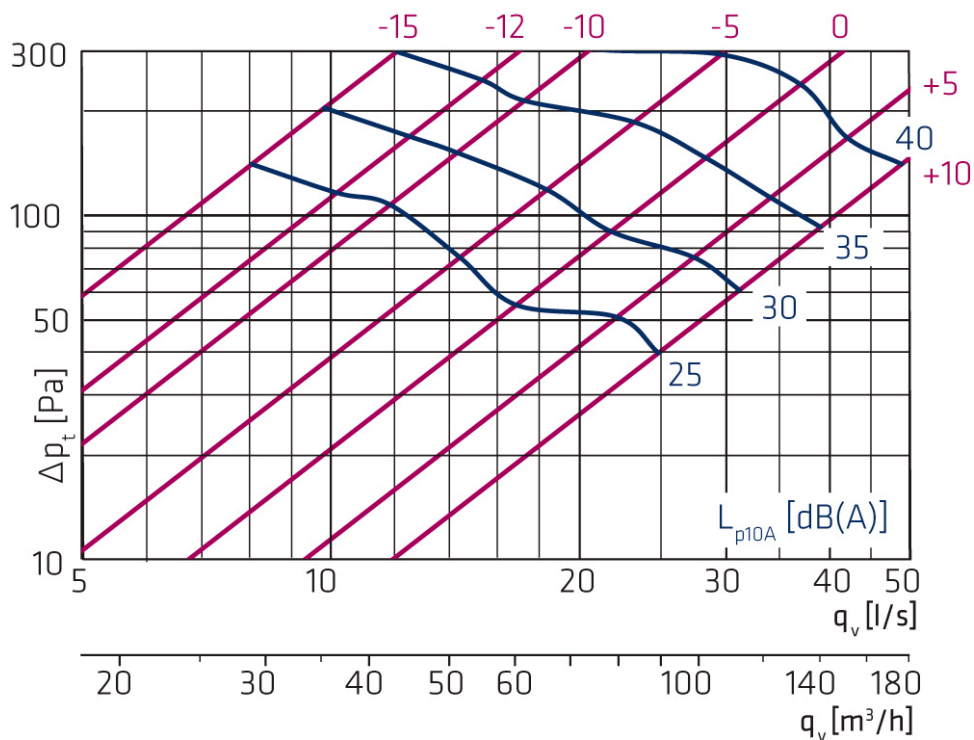

$$L_{w\text{okt}} = L_{pA10} + K$$

f, Hz	63	125	250	500	1k	2k	4k	8k
--------------	----	-----	-----	-----	----	----	----	----

K, dB	16	5	-3	-2	0	-3	-6	-13
--------------	----	---	----	----	---	----	----	-----

ΔL (dB)

Dt, dB	23	19	14	13	12	14	7	8
---------------	----	----	----	----	----	----	---	---

VIP-125 and VIP-S-125

VIP-160

VIP-200

